

BS-280 Video Borescope



EMC
EN: 61326



High definition 3.5" Color TFT LCD, supporting photo/video, time/date display and multi-languages. Video and images can also be transferred to your PC via the SD Card or USB cable (included). Modern design housing with waterproof (IP67) flexible gooseneck retains configured shape.



3.5" Color-TFT-LCD

Flexible gooseneck imager head with waterproof and Easily perform visual inspections in hard to reach areas

Camera and Video function

Compatible with TV(TV-OUT)

Allows user to view image on LCD monitor

High visibility and 10 degree adjustable LED lighting

Rechargeable battery with USB cable Support SD memory card extension

Menu with multinational language

Specifications

LCD screen type	3.5" TFT
LCD Pixels	320x240
The max number of frames(FPS)	30FPS/S
Picture format from the camera	JPG(1280x1024/640x480/1024x768)
Camera video format	MP4/AVI (640x480)
Gooseneck length	1m(39")
Camera diameter	17mm(0.66")
Viewing distance	5cm to 15cm
Viewing angle	68°
Zoom and Rotation	3xZoom, 5°/15°/30°/90° rotation
SD card	2GB/Max 32GB
Working voltage	Li Battery 3.7V/1800mA
TV-OUT	PAL/NTSC system
Language	Support English, French, German, Spanish

Size(HxWxD): 240mm x 160mm x 100mm

Weight: 584g

Accessories:
3.7V Li battery, power adaptor, mirror, hook, magnet, gift box with carrying case.



BT-17
Φ17mm Camera
Probe



BT-6
Φ6mm Camera
Probe



YC-17
Φ17mm Extension Cable
(1-3 meter optional)



BT-9
Φ9mm Camera
Probe

Accessories:

Mirror, Hook & Magnet



BS-100/101/150 Video Borescope

3.2" Color TFT LCD, supporting photo/video, time/date display and multi-languages. Video and images can also be transferred to your PC via the SD Card or USB cable (included). Waterproof (IP67) flexible gooseneck retains configured shape.




EMC
EN: 61326



Specifications

LCD screen type	3.2" TFT
LCD Pixels	320x240
The max number of frames(FPS)	30FPS/S
Picture format from the camera	JPG(320x240)
Camera video format	3GP
Gooseneck length	1m(39")
Camera diameter	17mm(0.66")
Viewing distance	5cm to 15cm
Viewing angle	68°
SD card	Max 8GB
Working voltage	Li Battery 3.7V/1800mA
TV-OUT	PAL/NTSC system
Language	Support English, French, German, Spanish

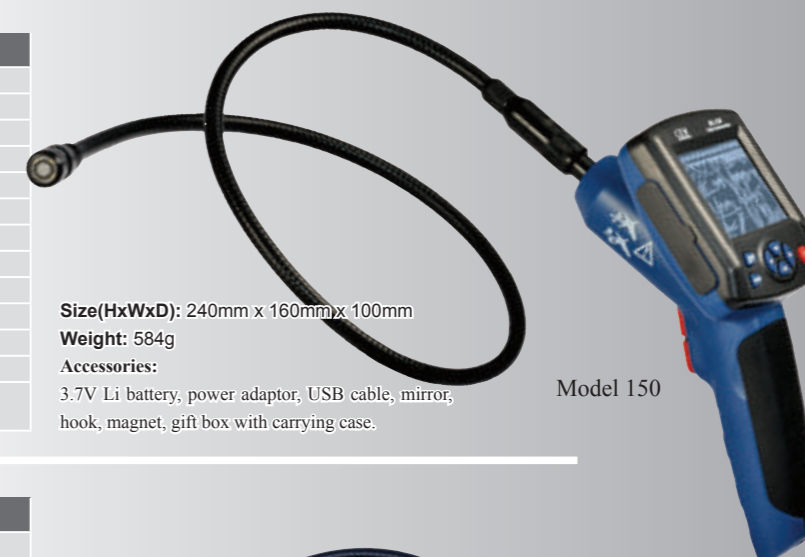

Size(HxWxD): 240mm x 160mm x 100mm

Weight: 584g

Accessories:
3.7V Li battery, power adaptor, USB cable, mirror, hook, magnet, gift box with carrying case.

Model 150

Features

Support real-time live view
TV peripherals to support operations in other devices
Highlighted with LED to support the operation in the dark
Built-in 1800mAh lithium battery, support USB charging
Standby function to support the charge
Support rotating the image 180° from top to bottom
Flexible gooseneck imager head with waterproof
3.5" Color TFT LCD
Camera and Video function

Specifications

LCD screen type	3.5" TFT
LCD Pixels	320x240
The max number of frames(FPS)	30FPS/S
Gooseneck length	1m(39")
Camera diameter	17mm(0.66")
Viewing distance	5cm to 15cm
Viewing angle	68°
Working voltage	Li Battery 3.7V/1800mA
TV-OUT	PAL/NTSC system



Size(HxWxD): 240mm x 160mm x 100mm

Weight: 584g

Accessories:
3.7V Li battery, power adaptor, mirror, hook, magnet, gift box with carrying case.

Model 101

Features

Support real-time live view
TV peripherals to support operations in other devices
Highlighted with LED to support the operation in the dark
Built-in 1800mAh lithium battery, support USB charging
Standby function to support the charge
Support rotating the image 180° from top to bottom
Flexible gooseneck imager head with waterproof
3.0" Color TFT LCD

Specifications

LCD screen type	3.0" TFT
LCD Pixels	960x240
The max number of frames(FPS)	30FPS/S
Gooseneck length	1m(39")
Camera diameter	17mm(0.66")
Viewing distance	5cm to 15cm
Viewing angle	68°
Working voltage	Li Battery 3.7V/1800mA
TV-OUT	PAL/NTSC system



Size(HxWxD): 240mm x 160mm x 100mm

Weight: 584g

Accessories:
3.7V Li battery, power adaptor, mirror, hook, magnet, gift box with carrying case.

Model 100