


## Elcometer 3520 Baker Film Applicator

The Elcometer 3520 Baker Film Applicator is made of hardened stainless steel with a cylindrical applicator body. These gauges apply a coating of specified thickness and film width on flat, relatively firm substrates.

It can also be used with the Elcometer 4340 Motorised Film Applicators.

Each Elcometer 3520 Baker Film Applicator has four high precision specified coating thickness sizes for accuracy and is available in a range of film widths.

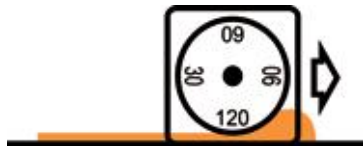

Elcometer 3520



**STANDARDS:**  
 ASTM D 823-E

### Technical Specification

C

Part Number	Model	Film Thickness				Film Width <sup>+</sup>	Certificate
		µm				mm	
K0003520M001	Elcometer 3520/1	30,	60,	90,	120	25	○
K0003520M002	Elcometer 3520/2	30,	60,	90,	120	50	○
K0003520M003	Elcometer 3520/3	30,	60,	90,	120	60	○
K0003520M101	Elcometer 3520/101	50,	100,	150,	200	60	○
K0003520M004	Elcometer 3520/4	30,	60,	90,	120	75	○
K0003520M005	Elcometer 3520/5	30,	60,	90,	120	100	○
K0003520M006	Elcometer 3520/6	30,	60,	90,	120	125	○
K0003520M007	Elcometer 3520/7	30,	60,	90,	120	150	○
K0003520M011	Elcometer 3520/11	30,	60,	90,	120	175	○
K0003520M008	Elcometer 3520/8	30,	60,	90,	120	200	○
K0003520M009	Elcometer 3520/9	30,	60,	90,	120	250	○

<sup>+</sup> Add 30mm (1.2") to the Film Width to calculate the total width of the applicator



Can be used with the Elcometer 4340 Motorised Film Applicator.

○ Optional Calibration Certificate available.