



# Thermometer operated with your smartphone

testo 915i – wireless Smart Probe  
with plug-in measurement probes

---

Smart Probe with wireless temperature measurement in the most diverse applications, thanks to large selection of probes and compatibility with common Type K thermocouple probes

---

Secure attachment of the Testo measurement probe thanks to innovative locking mechanism on the handle

---

Easy operation, evaluation and documentation with cost-free testo Smart App

---

Automatic Bluetooth® connection to smartphones, tablets or Testo measuring instruments (.g. testo 400, testo 550s) with a range of up to 100 m

---

High measurement accuracy thanks to system calibration ex-works

---



The wireless Smart Probe testo 915i with plug-in TC probes makes temperature measurements even faster, easier and more flexible. Thanks to the innovative locking mechanism with compatibility with all Testo and other common Type K thermocouple probes, the Smart Probe can be used in the most diverse applications.

The measurement values are displayed in the cost-free testo Smart App, and temperature curves presented in a clear and graphic way. All measurement data can be reported directly in the App and then sent as PDF or CSV files.


testo 915i connects automatically by Bluetooth® to the App on the smartphone, tablet or directly with other measuring instruments from Testo.

testo 915i is available with various Class 1 plug-in probes: immersion/penetration probes, surface probes, air probes or flexible probes. testo 915i as a kit with three temperature probes in a practical Smart Case is especially versatile. Thanks to its proven quality and great durability, you can rely on your Testo Smart Probe in any conditions.

## Order data

**testo 915i with flexible probe**


Wireless Smart Probe testo 915i with flexible probe (TC Type K), incl. batteries and calibration protocol.



Order no. 0563 4915

**testo 915i with air probe**

Wireless Smart Probe testo 915i with air probe (TC Type K), incl. batteries and calibration protocol.



Order no. 0563 3915

**testo 915i with immersion/penetration probe**

Wireless Smart Probe testo 915i with immersion/penetration probe (TC Type K), incl. batteries and calibration protocol.



Order no. 0563 1915

**testo 915i with surface probe**


Wireless Smart Probe testo 915i with surface probe (TC Type K), incl. batteries and calibration protocol.



Order no. 0563 2915


**testo 915i kit**

Universal temperature kit consisting of Smart Probe testo 915i with plug-in immersion/penetration probe, air probe and surface probe in Smart Case, incl. batteries and calibration protocol.



Order no. 0563 5915

## testo Smart App

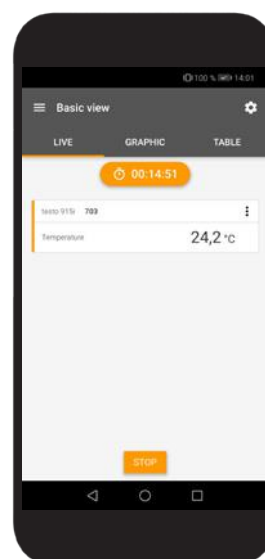

**The cost-free testo Smart App turns your smartphone/tablet into the display for the testo 915i.** The operation of the Smart Probe and the display of the measurement values take place wirelessly by Bluetooth® on your smartphone – independently of the measurement location. In addition, you can use the App to create measurement reports, add photos and comments to these and conveniently send them by e-mail.

### testo Smart App

for free download of iOS and Android




**NDTKALA.CO**  
 Non-Destructive Test (NDT) Equipment

تامین تجهیزات و مواد مصرفی تست های غیر مخرب ایران  
 ۰۲۱-۷۱۰۵۳۸۸۸ ۰۹۱۲۰۲۴۶۲۷۰





# Technical data

	testo 915i with flexible probe	testo 915i with air probe	testo 915i with immersion/ penetration probe	testo 915i with surface probe	testo 915i kit with air probe, immersion/penetration probe and surface probe	
Sensor type	TC Type K					
Measuring range	-50 to +400 °C	-50 to +400 °C		-50 to +350 °C	see respective columns testo 915i with air probe, immersion/penetration probe and surface probe	
System accuracy (handle testo 915i + probe)	±1.0 °C (-30 to +80 °C) ±(0.7 °C + 1 % of measured value) (-50 to -30 °C) ±(0.2 °C + 1 % of measured value) (+80 to +400°C)		±1.0 °C (-50 to +100 °C) ±1 % of measured value (remaining meas. range)	±(1.0 °C + 1 % of m.v.)		
Resolution	0.1°C/°F					
t <sub>90</sub> (at 1 m/s)	3 s	60 s	3 s	3 s		
Protection class	IP40	IP20	IP40	IP20		
Probe length	800 mm	99 mm	115 mm	136 mm		
Probe diameter		Ø probe shaft 4 mm	Ø probe shaft 5 mm Ø probe tip 3 mm	Ø probe shaft 5 / 3 mm Ø probe tip 12 mm		
Probe locking	Yes (with handle testo 915i)					
Weight	96 g	99 g	99 g	110 g		

Common data Bluetooth® handle testo 915i			
Measuring range	-60 to +1000 °C	Function indicator	3-colour LED (orange/red/green)
Accuracy	±(0.5 °C + 0.3 % of measured value)	Compatibility	requires iOS 12.0 or newer/Android 6.0 or newer
Resolution	0.1°C/°F		requires mobile end device with Bluetooth® 4.0
Protection class	IP30	Bluetooth®	Range up to 100 m
Operating temperature	-20 to +50 °C		automatic connection to testo Smart App and Testo measuring instruments
Storage temperature	-20 to +60 °C	Auto off	after 10 Minuten without Bluetooth® connection
Dimensions	129 x 31 x 31 mm	Measurement/ connection cycle	1 s
Battery type	3 AAA microcells		
Battery life	150 h at +25 °C and measurement cycle 1 s		
Plug-in probe connection	Lockable connection to 4 standard probes testo 915i Standard plug-in connection to other common TC probes		

Bluetooth® handle	Dimensions	Measuring range	Accuracy handle
Bluetooth® handle testo 915i with locking mechanism for secure attachment of the 4 standard probes of testo 915i		-60 to +1000 °C	±(0.5 °C + 0.3 % of measured value)









  

Probe type	Dimensions	Measuring range	System accuracy*	Probe accuracy	Response time
Flexible probe, TC Type K, for secure attachment to the locking mechanism of the Bluetooth® handle		-50 to +400 °C	±1.0 °C (-30 to +80 °C) ±(0.7 °C + 1 % of measured value) (-50 to -30 °C) ±(0.2 °C + 1 % of measured value) (+80 to +400°C)	Class 1 <sup>1)</sup>	3 sec
Air probe, TC Type K, for secure attachment to the locking mechanism of the Bluetooth® handle		-50 to +400 °C	±1.0 °C (-50 to +100 °C) ±1 % of measured value (remaining meas. range)	Class 1 <sup>1)</sup>	60 sec
Immersion/penetration probe, TC Type K, for secure attachment to the locking mechanism of the Bluetooth® handle		-50 to +400 °C	±1.0 °C (-50 to +100 °C) ±1 % of measured value (remaining meas. range)	Class 1 <sup>1)</sup>	3 sec
Surface probe, TC Type K, for secure attachment to the locking mechanism of the Bluetooth® handle		-50 to +350 °C	±(1.0 °C + 1 % of m.v.)	Class 1 <sup>1)</sup>	3 sec

\* System accuracy testo 915i handle and standard probes testo 915i.














<sup>1)</sup> According to standard EN 60584-1, the accuracy of Class 1 refers to -40 to +1000 °C (Type K).

## Other temperature probes TC Type K

Probe type	Dimensions Probe shaft/probe shaft tip	Measuring range	Accuracy	Response time	Order no.
Robust air probe, TC Type K, fixed cable	 115 mm Ø 4 mm	-60 to +400 °C	Class 2 <sup>1)</sup>	200 sec	0602 1793
Very fast-reaction surface probe with sprung thermocouple strip, also suitable for uneven surfaces, measuring range briefly up to +500°C, TC Type K, fixed cable	 115 mm Ø 5 mm	-60 to +300 °C	Class 2 <sup>1)</sup>	3 sec	0602 0393
Fast-reaction paddle surface probe, for measurements in places that are difficult to access, e.g. narrow openings and cracks, TC Type K, fixed cable	 145 mm Ø 8 mm 40 mm Ø 7 mm	0 to +300 °C	Class 2 <sup>1)</sup>	5 sec	0602 0193
Precise, watertight surface probe with small measuring head for even surfaces, TC Type K, fixed cable	 150 mm Ø 2.5 mm	-60 to +1000 °C	Class 1 <sup>1)</sup>	20 sec	0602 0693
Very fast-reaction surface probe with sprung thermocouple strip, angled for uneven surfaces as well, measuring range briefly up to +500°C, TC Type K, fixed cable	 80 mm Ø 5 mm 50 mm	-60 to +300 °C	Class 2 <sup>1)</sup>	3 sec	0602 0993
Surface temperature probe TC Type K, with telescope max. 985 mm, for measurements in locations that are difficult to access, fixed cable 1.6 m (correspondingly shorter when telescope is extended)	 985 ±5 mm 12 mm Ø 25 mm	-50 to +250 °C	Class 2 <sup>1)</sup>	3 sec	0602 2394
Magnetic probe, adhesive power approx. 20 N, with adhesive magnets, for measurements on metal surfaces, TC Type K, fixed cable	 35 mm Ø 20 mm	-50 to +170 °C	Class 2 <sup>1)</sup>	150 sec	0602 4792
Magnetic probe, adhesive power approx. 10 N, with adhesive magnets, for higher temperatures, for measurements on metal surfaces, TC Type K, fixed cable	 75 mm Ø 21 mm	-50 to +400 °C	Class 2 <sup>1)</sup>		0602 4892
Thermoelectric couple with TC plug, flexible, length 800 mm, glass fibre, TC Type K	 800 mm Ø 1.5 mm	-50 to +400 °C	Class 2 <sup>1)</sup>	5 sec	0602 0644
Thermoelectric couple with TC plug, flexible, length 1500 mm, glass fibre, TC Type K	 1500 mm Ø 1.5 mm	-50 to +400 °C	Class 2 <sup>1)</sup>	5 sec	0602 0645
Thermoelectric couple with TC plug, flexible, length 1500 mm, PTFE, TC Type K	 1500 mm Ø 1.5 mm	-50 to +250 °C	Class 2 <sup>1)</sup>	5 sec	0602 0646

<sup>1)</sup> According to standard EN 60584-1, the accuracy of Class 1 refers to -40 to +1000°C (Type K), of Class 2 to -40 to +1200°C (Type K) and of Class 3 to -200 to +40°C (Type K). A probe only ever complies with one accuracy class.

# Other temperature probes TC Type K

Probe type	Dimensions Probe shaft/probe shaft tip	Measuring range	Accuracy	t <sub>99</sub>	Order no.
Watertight surface probe with wider measuring tip for even surfaces, TC Type K, fixed cable	 115 mm Ø 5 mm Ø 6 mm	-60 to +400 °C	Class 2 <sup>1)</sup>	30 sec	0602 1993
Pipe wrap probe with Velcro strip, for measuring temperatures on pipes with diameters up to max. 120 mm, Tmax +120°C, TC Type K, fixed cable	 395 mm 20 mm	-50 to +120 °C	Class 1 <sup>1)</sup>	90 sec	0628 0020
Pipe wrap probe for pipe diameters 5 to 65 mm, with interchangeable measuring head, measuring range briefly up to +280°C, TC Type K, fixed cable		-60 to +130 °C	Class 2 <sup>1)</sup>	5 sec	0602 4592
Replacement measuring head for pipe wrap probe, TC Type K	 35 mm 15 mm	-60 to +130 °C	Class 2 <sup>1)</sup>	5 sec	0602 0092
Clamp probe for measurements on pipes, pipe diameters 15 to 25 mm (max. 1"), measuring range briefly up to +130°C, TC Type K, fixed cable		-50 to +100 °C	Class 2 <sup>1)</sup>	5 sec	0602 4692
Precise and fast immersion probe, flexible, watertight, TC Type K, fixed cable	 Ø 1.5 mm 300 mm	-60 to +1000 °C	Class 1 <sup>1)</sup>	2 sec	0602 0593
Ultra-fast, watertight immersion/penetration probe, TC Type K, fixed cable	 60 mm 14 mm Ø 5 mm Ø 1.5 mm	-60 to +800 °C	Class 1 <sup>1)</sup>	3 sec	0602 2693
Immersion measuring tip, flexible, TC Type K	 Ø 1.5 mm 500 mm	-200 to +1000 °C	Class 1 <sup>1)</sup>	5 sec	0602 5792
Immersion measuring tip, flexible, TC Type K	 Ø 1.5 mm 500 mm	-200 to +40 °C	Class 3 <sup>1)</sup>	5 sec	0602 5793
Immersion measuring tip, flexible, for measurements in air/flue gases (not suitable for measurements in smelters), TC Type K	 Ø 3 mm 1000 mm	-200 to +1300 °C	Class 1 <sup>1)</sup>	4 sec	0602 5693
Watertight immersion/penetration probe, TC Type K, fixed cable	 114 mm 50 mm Ø 5 mm Ø 3.7 mm	-60 to +400 °C	Class 2 <sup>1)</sup>	7 sec	0602 1293
Flexible, low-mass immersion measuring tip, ideal for measurements in small volumes, such as Petri dishes, or for surface measurements (e.g. fixed with adhesive tape)	 Ø 0.25 mm 500 mm TC Type K, 2 m, FEP-insulated thermal wire, temperature-resistant up to 200°C, oval cable with dimensions: 2.2 mm x 1.4 mm	-200 to +1000 °C	Class 1 <sup>1)</sup>	1 sec	0602 0493
Watertight food probe made of stainless steel (IP65), TC Type K, fixed cable	 125 mm 30 mm Ø 4 mm Ø 3.2 mm	-60 to +400 °C	Class 2 <sup>1)</sup>	7 sec	0602 2292

<sup>1)</sup> According to standard EN 60584-1, the accuracy of Class 1 refers to -40 to +1000°C (Type K), of Class 2 to -40 to +1200°C (Type K) and of Class 3 to -200 to +40°C (Type K). A probe only ever complies with one accuracy class.

## Accessories



Probe kit	Order no.
Probe kit, TC Type K, accuracy Class 1, consisting of immersion/penetration probe, air probe and surface probe. Secure attachment of the probe to the locking mechanism of the Bluetooth® handle	0602 5093
testo Smart Case	Order no.
testo Smart Case for the storage and transport of testo 915i and plug-in probes, dimensions 250 x 180 x 70 mm	0516 0032
Calibration certificates	Order no.
ISO temperature calibration certificate, for air/immersion probe, calibration points -18 °C; 0 °C; +60 °C	0520 0001
ISO calibration certificate temperature, for air/immersion probe, calibration point -18 °C	0520 0061
ISO calibration certificate temperature, for air/immersion probe, calibration point 0 °C	0520 0062
ISO calibration certificate temperature, for air/immersion probe, calibration point +60 °C	0520 0063
ISO temperature calibration certificate for surface probes; with 3 measuring points: +60 / +120 / +180 °C	0520 0071
ISO temperature calibration certificate for surface probes; with 1 measuring point: +60 °C	0520 0072
ISO temperature calibration certificate for surface probes; with 1 measuring point: +120 °C	0520 0073
DAkkS temperature calibration certificate for surface probes; with 3 measuring points: +100 / +200 / +300 °C	0520 0271

