
# **GTS820F**



### coating thickness gauge

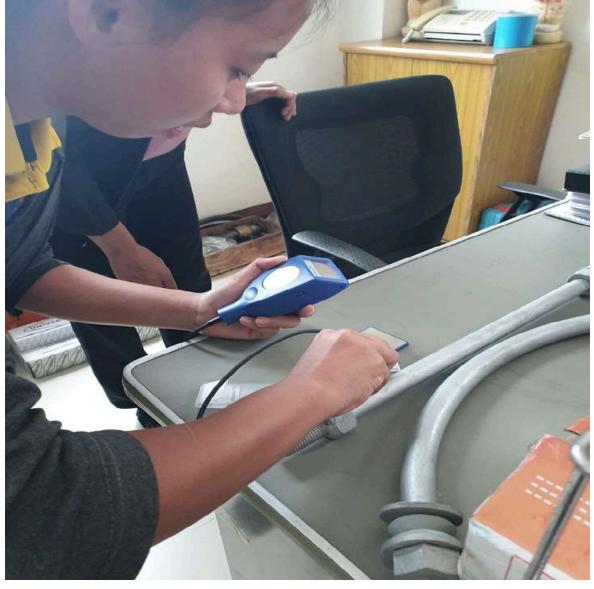

Memory

600 Data Groups

Data Output
USB & Bluetooth

Range **0 - 1500 μm** 

Ferrous Model Fe

Auto Detection Fe Probe

**Software APP** 









## GTS820F

### coating thickness gauge

#### **Features**

Fast, repeatable measurements
Ready to measure - no adjustment required
Single or Two Point Calibration Adjustment for
complex applications
Large Backlight Dot Matrix Display
Auto Power-Off
Auto recognition of the substrate (Fe )

Metric / Imperial Switchable
Min. Measuring Area: 5.0mm
600 Data memory
Low Battery Indicator

USB & Bluetooth Data Output

App Available on iOS, Android & Windows



Conforms to ISO2178 & ISO2361 as well as DIN, ASTM & BS.

Measurement Range	0 - 1500 μm	0 - 60 mils
Accuracy	<u>+</u> (1+ 2%μm)	<u>+</u> (0.1 mils + 2%)



**Size:** 126 x 69 x 35mm (5" x 2.7" x 1.4")

Weight: 97g (3.4 oz.) without batteries

#### Scope of Delivery

GTS82OF Instrument with FNF Probe, Precision Plastic Shims (Fe ) Calibration Blocks, 2 x AA Batteries, Manual & ABS Plastic Carry Case.

GUOOU

Instruments

Guangzhou GuoOu Electronic Technology Co.,Ltd

8O28 Baiye Plaza ,Gongyi Road Huadu District Guangzhou China.
MP/WHATSAPP: +86 138284 1 423 1

ray.yiu@guoou-testers.com | www.guoou-testers.com

www.guoou-testers.com